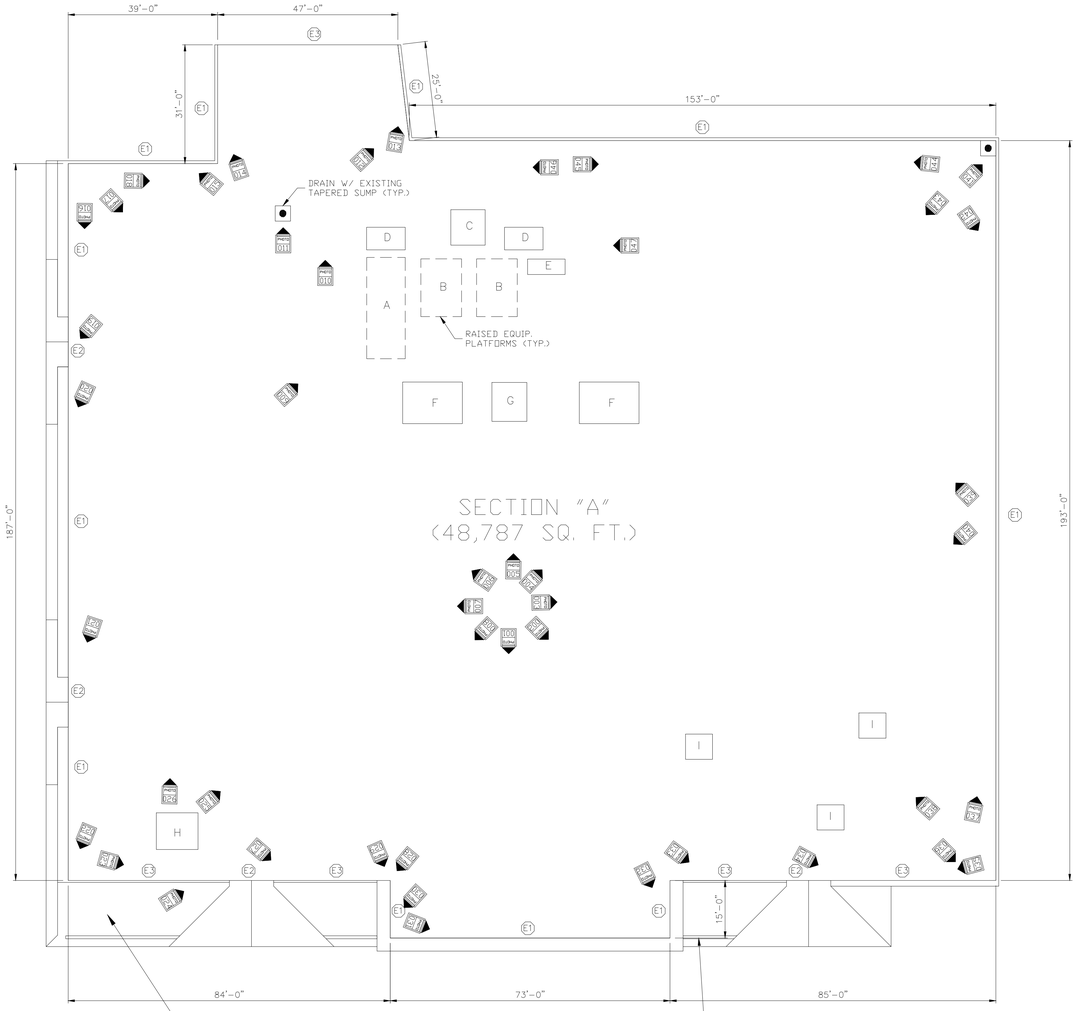

SECTION "B"
(APPROX. 4,500 SQ. FT.)
(ALL SHINGLE AREAS ON FRONT AND SIDES OF BUILDING)

REMOVE AND RE-LINE ALL BUILT-IN GUTTERS AS PART OF SHINGLE REPLACEMENT (APPROX. 50 LIN. FEET)

EDGE CONDITIONS LEGEND:

E1 — 0'-0" (H) TO 2'-5" (H)(VARIES) X 1'-6" TO 3'-5"(W)(VARIES) PARAPET WALL. REMOVE EXISTING METAL COPING AND WALL FLASHINGS. INSTALL FULLY ADHERED WALL FLASHING UP OVER EXIST. TOP PLATE AND DOWN FRONT FACE, INSTALL NEW TWO PIECE METAL FASCIA (SEE DET. d001)

E2 — 0'-6" TO 4'-0" (H) WALL FLASHING, REMOVE FLASHINGS. INSTALL FULLY ADHERED NEW WALL FLASHING, INSTALL TERM BAR, SEALANT AND SLIP FLASHING TO BACKSIDE OF NEW SHINGLE EDGE METAL (SEE DET d002)

E3 — GRAVEL STOP EDGE METAL, REMOVE EXISTING EDGE METAL, INSTALL NEW GRAVEL STOP EDGE METAL W/ FULLY ADHERED FLASHING (SEE DET d003)

NOTE: WHERE NEW SHINGLES ARE SPECIFIED TO BE INSTALLED ON OUTER FACE OF GRAVEL STOP, INSTALL METAL SLIP FLASHING UNDER GRAVEL STOP AND OVER NEW SHINGLES

ROOF PLAN

PENETRATIONS LIST:

CURBS:

A – CHILLER UNIT ON (4) 8" LONG EQUIPMENT SUPPORT CURBS

B – CHILLER UNIT ON 16' LONG EQUIPMENT SUPPORT CURBS

C – 6' X 7' RTV

D – 4'6" X 4'6" RTV

E – 3' X 7'6" RTU

F – 7' X 10' RTU

G – 5'6" X 10'6" RTU

H – 4'6" X 7' RTU

I – 3'6" X 6'6" RTU

ROOF HATCH – 3' X 3'6"

PIPES

1" – 62

2" – 5

4" – 13

5" – 1

VENT STACKS

6" – 2

8" – 3

10" – 1

RTV'S

1'4" X 1'4" – 5

1'6" X 1'6" – 1

KITCHEN EXHAUST FANS

1'6" X 1'6" – 2

1'9" X 1'9" – 1

3' X 3' SATELLITE DISH PAD – 1 (SET ON WALK PADS)

1'6" X 1'6" UTILITY HOOD – 1

CONDENSER ON (2) 2" LONG WOOD SUPPORTS – 1 (REPLACE WOOD WITH P.T. LUMBER TO MATCH EXISTING SET ON WALK PADS)

General Notes

ROOFING PROJECTS

DISCLAIMER

ALL IDEAS, DESIGNS ARRANGEMENTS, AND PLANS INDICATED OR REPRESENTED BY THIS DRAWING ARE OWNED BY, AND ARE THE PROPERTY OF ROOFINGPROJECTS.COM AND WERE CREATED, EVOLVED AND DEVELOPED FOR USE ON AND IN CONNECTION WITH THE SPECIFIED PROJECT. NONE OF SUCH IDEAS, DESIGNS, ARRANGEMENTS OR PLANS SHALL BE USED BY OR DISCLOSED TO ANY PURPOSE WHATSOEVER WITHOUT THE WRITTEN PERMISSION OF ROOFINGPROJECTS.COM.

WRITTEN DIMENSIONS ON THIS DRAWING SHALL TAKE PRECEDENCE OVER SCALED DIMENSIONS. CONTRACTORS SHALL VERIFY AND BE RESPONSIBLE FOR ALL DIMENSIONS AND CONDITIONS ON THE JOB AND THIS OFFICE MUST BE NOTIFIED OF ANY VARIATIONS FROM THE DIMENSIONS AND CONDITIONS SHOWN BY THESE DRAWINGS.

No.	Revision/Issue	Date

Firm Name and Address

RoofingProjects-com
17 High Street
Suite 301
Norwalk,CT
06851

Project Name and Address

2026
Shaws #649
820 Waterbury-Stowe Rd
Waterbury, VT 05676

Project	Sheet
Date: May 4, 2026	1
Scale: 1/16" = 1'-0"	