


ROOF PLAN

- PENETRATIONS LIST:**
- CURBS:**
- A - CHILLER UNIT ON (2) 16' LONG EQUIPMENT SUPPORT CURBS
  - B - (2) CHILLER UNITS ON (2) 21' LONG EQUIPMENT SUPPORT CURBS
  - C - CHILLER UNIT ON (2) 21' LONG EQUIPMENT SUPPORT CURBS
  - D - 5' X 5' RTV
  - E - 4'6" X 7' RTV
  - F - 3'6" X 6' RTV
  - G - CONDENSER ON (2) 9'6" LONG EQUIPMENT SUPPORT CURBS
  - H - 4' X 7' RTV
  - I - 4'6" X 4'6" RTV
  - J - 7' X 24' RTV
- ROOF HATCH - 3' X 5'**
- PIPES**
- 1" - 9
  - 2" - 5
  - 3" - 5
  - 4" - 12
- VENT STACKS**
- 1'6" X 1'6" - 7
- RTV'S**
- 2' X 2' - 12
  - 2'6" X 2'6" - 3
  - 3' X 3' - 1

- KITCHEN EXHAUST FANS**
- 1'6" X 1'6" - 2
  - 2' X 2' - 1
  - 2'6" X 2'6" - 1
- UTILITY HOODS**
- 1' X 4'6" - 2
  - 1'9" X 2' - 1
  - 2'6" X 3'6" - 3
- VIEW SCREEN EQUIPMENT SUPPORT CURBS**
- 4'6" - 5
  - 6'6" - 17
  - 10'6" - 1
- ABANDONED CURBS (REMOVE CURB, CLOSE OPENING IN DECK, INFILL INSULATION TO MATCH HEIGHT OF ROOF SYSTEM AND ROOF OVER)**
- 1'6" X 1'6" - 2
  - 2' X 2' - 1
- 2' LONG EQUIPMENT SUPPORT CURBS (NOT FOR VIEW SCREEN) - 5**
- 1'6" X 3' SATELLITE DISH BASE CURB (REMOVE) - 1 REMOVE CURB, CLOSE OPENING IN DECK, INFILL INSULATION TO MATCH HEIGHT OF ROOF SYSTEM AND ROOF OVER**

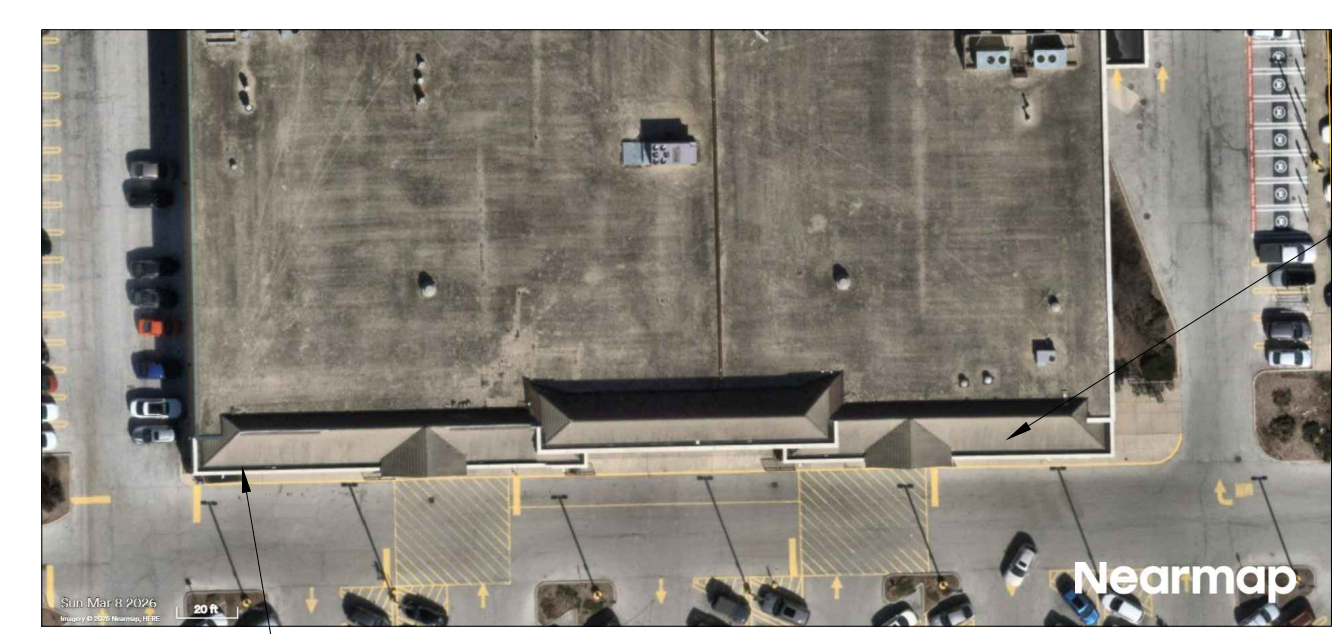

BASE BID: AT ALL EPDM LINED BUILT-IN GUTTERS AT THE BASE OF ALL SLOPED ROOF AREAS (APPROX. 320 LIN. FT.) REMOVE THE EXISTING GUTTER LINING AND INSTALL NEW FULLY ADHERED UN-REINFORCED EPDM GUTTER LINER - LEAVE METAL COPING IN PLACE AND INSTALL TERM BAR AND SLIP FLASHING

--- CENTERLINE OF 2'-0" WIDE WALKWAY PATH  
APPROX. 2,200 LINEAL FEET

SECTION "C"  
(330 SQ. FT.)

- EDGE CONDITIONS LEGEND:**
- E1 - 8" (H) TO 4'-7" (HXVARIES) PARAPET WALL. REMOVE EXISTING METAL COPING, WALL FLASHINGS AND ANY LOW METAL COUNTER FLASHING. INSTALL 1/2" DENS DECK TO INSIDE FACE OF WALL FULL HEIGHT. INSTALL FULLY ADHERED WALL FLASHING UP OVER EXIST. TOP PLATE AND DOWN FRONT FACE. INSTALL NEW TWO PIECE METAL FASCIA (SEE DET. 0001)
  - E2 - 4'-0" TO 15'-0" (HXVARIES) SLOPED SHINGLE AREA. INSTALL 1/2" DENS DECK OVER EXISTING SHINGLES. FULLY ADHERE NEW WALL FLASHING FULL HEIGHT. INSTALL TERM BAR, SEALANT AND SLIP FLASHING METAL ANCHORED TO BACKSIDE OF EXISTING METAL RIDGE FLASHING AND INSTALL SEALANT ON ANY EXPOSED FASTENERS (SEE DET. 0002)
  - E3 - 8" (H) X 1'-0" (W) RAISED EXP. JOINT. REMOVE EXISTING WALL FLASHINGS & RAISED EXP. JOINT CAP. INSTALL 1/2" DENS DECK OVER EXISTING FLASHING SUBSTRATES. INSTALL FULLY ADHERED WALL FLASHINGS ON BOTH SIDES AND EXTEND OVER TOP OF JOINT. INSTALL NEW METAL CAP TO MATCH EXISTING CONFIGURATION.
  - E4 - 2'-0" (H) WALL FLASHING. REMOVE ALL FLASHINGS. INSTALL 1/2" DENS DECK OVER FLASHING SUBSTRATE AND FULLY ADHERE NEW WALL FLASHING. INSTALL TERM BAR, SEALANT AND NEW SURFACE MOUNTED COUNTER FLASHING w/ SEALANT JOINT (SEE DET. 0003)

SECTION "D"  
(ALL COMPOSITE SHINGLE AREAS)  
(APPROX. 5,300 SQ. FT.)

AT ALL CEMENT COMPOSITE SHINGLE AREAS, THE BID FORM WILL ADDRESS AN ADD ALTERNATE PRICE TO REMOVE SHINGLES DOWN TO THE SUBSTRATE, INSTALL UNDERLAYMENT AND NEW ASPHALT SHINGLES AS PER SPECIFICATION

General Notes



DISCLAIMER  
ALL DESIGN, DESIGN ARRANGEMENTS, AND PLANS INDICATED OR REPRESENTED BY THIS DRAWING ARE OWNED BY AND ARE THE PROPERTY OF RP ROOFING PROJECTS.COM AND WERE CREATED, EVOLVED AND DEVELOPED FOR USE ON AND IN CONNECTION WITH THE SPECIFIED PROJECT. NONE OF SUCH LOGOS, DESIGNS, ARRANGEMENTS OR MARKS SHALL BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT THE WRITTEN PERMISSION OF RP ROOFING PROJECTS.COM.  
WRITTEN DIMENSIONS ON THIS DRAWING SHALL TAKE PRECEDENCE OVER SCALED DIMENSIONS. CONTRACTORS SHALL VERIFY AND BE RESPONSIBLE FOR ALL DIMENSIONS AND CONDITIONS ON THE JOB AND THIS OFFICE MUST BE NOTIFIED OF ANY VARIATIONS FROM THE DIMENSIONS AND CONDITIONS SHOWN BY THESE DRAWINGS.

No.	Revision/Issue	Date

Firm Name and Address  
RoofingProjects-com  
17 High Street  
Suite 301  
Norwalk, CT  
06851

Project Name and Address  
2026  
Jewel-Osco #2363  
5616 W 159th St  
Oak Forest, IL 60452

Project	Sheet
Date May 27, 2026	1
Scale 1/16" = 1'-0"	