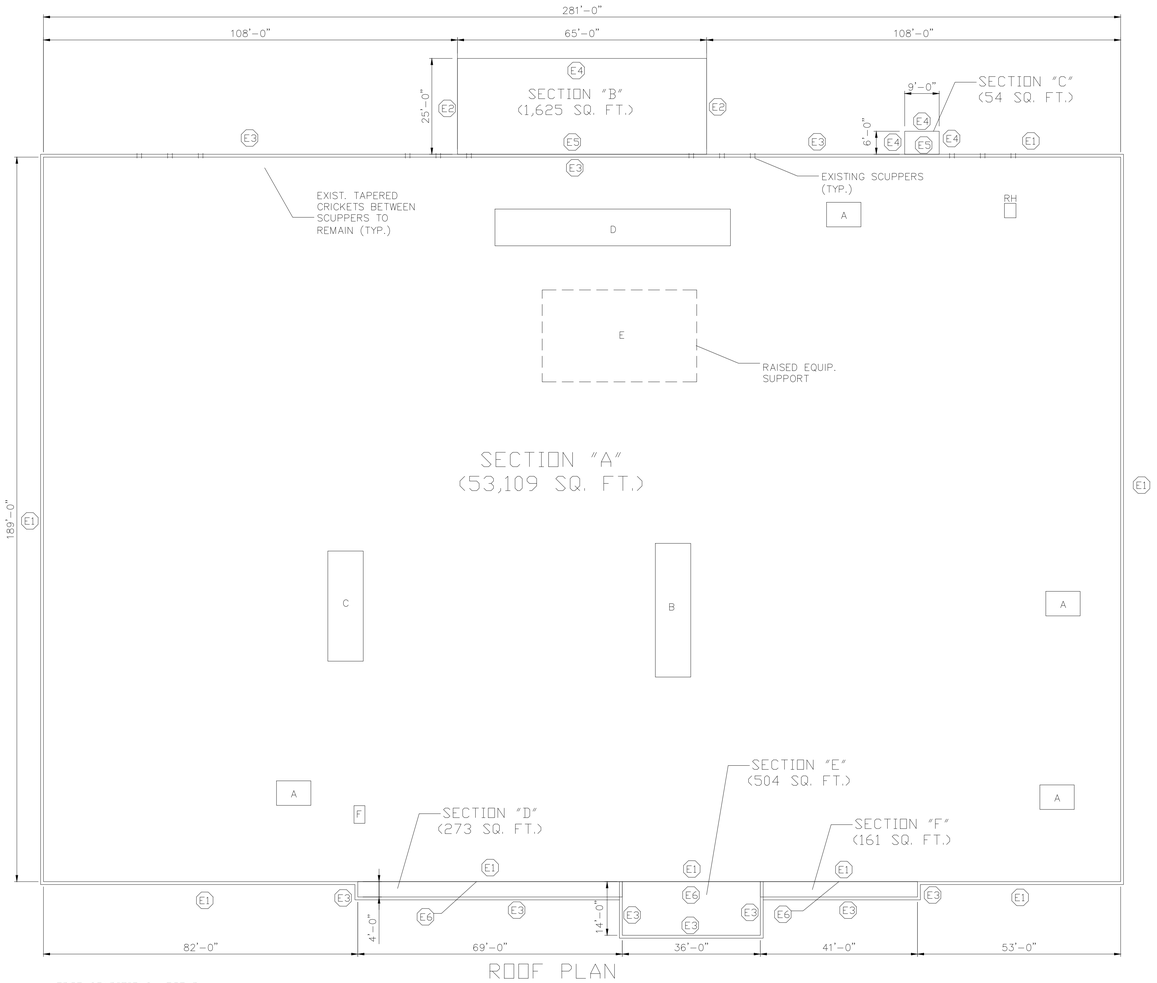

ROOF PLAN

EDGE CONDITIONS LEGEND:

E1 – 11" (H) WALL FLASHING, REMOVE ALL FLASHINGS LEAVING METAL COUNTER FLASHING TO REMAIN. INSTALL 1/2" DENS DECK MECH ATTACHED HOLDING TOP 3" TO 4" BELOW BOTTOM OF EXISTING COUNTER FLASHING. FULLY ADHERE NEW WALL FLASHING, INSTALL TERM BAR TO EXISTING SUBSTRATE (ABOVE TOP OF NEW DENS DECK), SEALANT AND SLIP FLASHING TO BACKSIDE OF EXISTING COUNTER FLASHING (SEE DET d001)

E2 – GRAVEL STOP EDGE METAL, REMOVE EXISTING EDGE METAL, INSTALL NEW WOOD BLOCKING TO MATCH HEIGHT OF NEW ROOF SYSTEM & NEW GRAVEL STOP EDGE METAL W/ FULLY ADHERED FLASHING (SEE DET d002)

E3 – 1'-8" TO 2'-5" (H)(VARIES) WALL FLASHING, REMOVE ALL FLASHINGS LEAVING METAL COPING TO REMAIN. INSTALL 1/2" DENS DECK MECH ATTACHED HOLDING TOP 3" TO 4" BELOW BOTTOM OF EXISTING COPING METAL. FULLY ADHERE NEW WALL FLASHING, INSTALL TERM BAR TO EXISTING SUBSTRATE (ABOVE TOP OF NEW DENS DECK), SEALANT AND SLIP FLASHING TO BACKSIDE OF EXISTING METAL COPING (SEE DET d001)

E4 – REMOVE EXIST. DRIP EDGE METAL AND GUTTER INSTALL NEW WOOD BLOCKING AND TAPERED EDGE STRIP TO MATCH HEIGHT OF NEW ROOF SYSTEM, TO PROMOTE DRAINAGE INTO GUTTER AND PREVENT PONDING ALONG ROOF EDGE. INSTALL NEW 6" X 6" BOX GUTTER W/ NEW DOWNSPOUTS IN ORIGINAL LOCATIONS TO MATCH EXISTING CONFIGURATION (SEE DET d003)

E5 – 1'-0" (H) WALL FLASHING, REMOVE ALL FLASHINGS INSTALL 1/2" DENS DECK MECH ATTACHED OVER FLASHING SUBSTRATE FULLY ADHERE NEW WALL FLASHING, INSTALL TERM BAR (ABOVE TOP OF DENS DECK), SEALANT AND NEW SURFACE MOUNTED COUNTER FLASHING W/ SEALANT JOINT (SEE DET d004)

E6 – EXIST. DRIP EDGE METAL AND GUTTER TO REMAIN REMOVE EXISTING FLASHINGS AND INSTALL NEW FLASHING OVER EXISTING METAL EDGE (INTO GUTTER) AND INSTALL NEW TERM BAR AND SEALANT

PENETRATIONS LIST:

CURBS
A - 5'X8'6" RTU
B - RTU ON 8'X24' CURB WITH (2) 5" ROUND SUPPORTS
C - RTU ON 8'X20' CURB WITH (2) 5" ROUND SUPPORTS
D - 10'X63' RTU
E - CHILLER UNITS ON 25'X50' I BEAMS WITH (20) 5" ROUND SUPPORTS
RH - 3'X3'6"
F - 3'X4' RTU

PIPES
1" - 8
3" - 13
4" - 17
5" - 8

RTV'S
1'6"X1'6" - 3
2'X2' - 1
2'3"X2'3" - 1

KITCHEN EXHAUST FANS
1'9"X1'9" - 2
2'6"X2'6" - 1

OVERFLOW SCUPPERS
7"X14"

THRU WALL SCUPPERS
7"X30"

SATELLITE DISH ON 6" ROUND POST - 1

General Notes

RP ROOFING PROJECTS

DISCLAIMER

ALL IDEAS, DESIGNS ARRANGEMENTS, AND PLANS INDICATED OR REPRESENTED BY THIS DRAWING ARE OWNED BY, AND ARE THE PROPERTY OF ROOFINGPROJECTS.COM AND WERE CREATED, EVOLVED AND DEVELOPED FOR USE ON AND IN CONNECTION WITH THE SPECIFIED PROJECT. NONE OF SUCH IDEAS, DESIGNS, ARRANGEMENTS OR PLANS SHALL BE USED BY OR DISCLOSED TO ANY PURPOSE WHATSOEVER WITHOUT THE WRITTEN PERMISSION OF ROOFINGPROJECTS.COM.

WRITTEN DIMENSIONS ON THIS DRAWING SHALL TAKE PRECEDENCE OVER SCALED DIMENSIONS. CONTRACTORS SHALL VERIFY AND BE RESPONSIBLE FOR ALL DIMENSIONS AND CONDITIONS ON THE JOB AND THIS OFFICE MUST BE NOTIFIED OF ANY VARIATIONS FROM THE DIMENSIONS AND CONDITIONS SHOWN BY THESE DRAWINGS.

No.	Revision/Issue	Date

Firm Name and Address

RoofingProjects-com
17 High Street
Suite 301
Norwalk,CT
06851

Project Name and Address

2026
Silver Bears Real Estate
Publix
12070 County Line Rd C
Madison, AL 35756

Project

Date
July 2, 2026

Scale
1/16" = 1'-0"

Sheet
1