


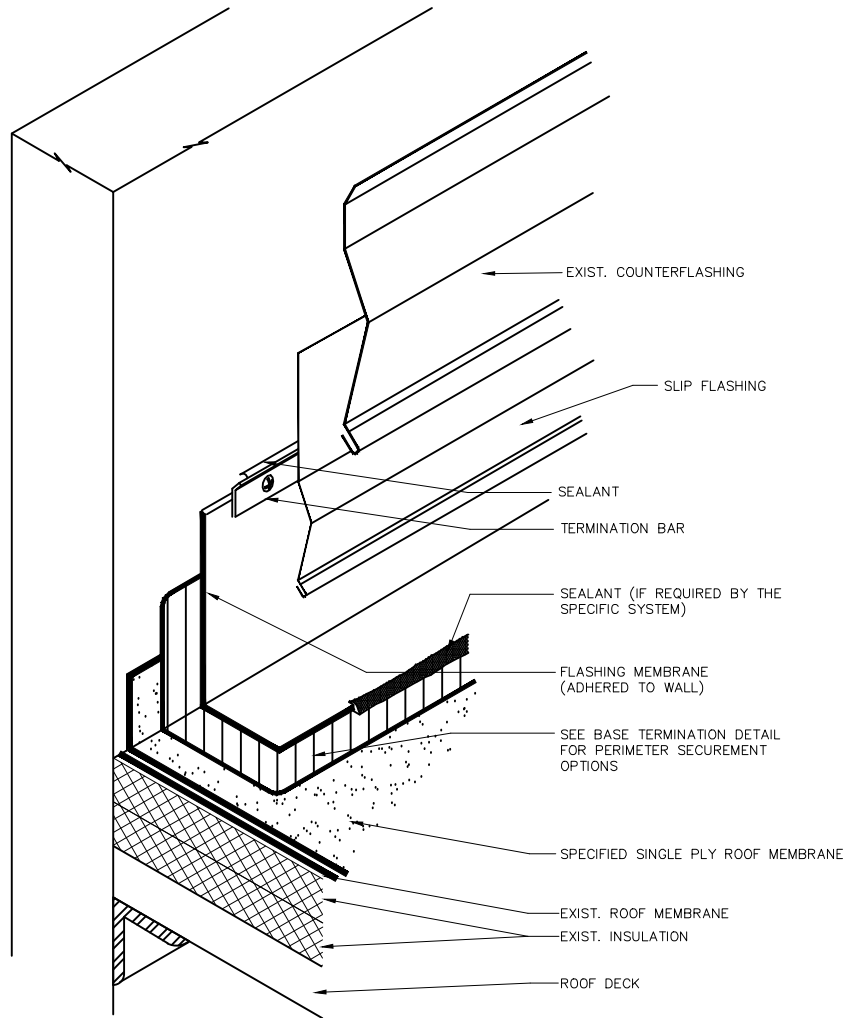

NOTES:

1. THIS DETAIL SHOULD BE USED ONLY WHERE THE DECK IS SUPPORTED BY THE WALL.
2. TOP LAYER OF INSULATION CAN BE EITHER THERMAL INSULATION OR COVERBOARD INSULATION.
3. REMOVE EXISTING FLASHINGS & INSTALL 1/2" MECH ATTACHED DENS DECK OVER FLASHING SUBSTRATE
HOLD TOP OF DENS DECK DOWN 3" TO 4" SO TERM BAR CAN BE INSTALLED OVER TOP TO EXISTING SUBSTRATE

PROJECT TITLE :

ROOF RECOVERY
2026
SILVER BEARS
REAL ESTATE
PUBLIX
MADISON AL

JOB NO,

DRAWN BY :

CHECKED

SCALE

DATE

7/2/2026

CAD FILE

SHEET

DRAWING NO.

d001



SLIP FLASHING TO EXISTING
COUNTER FLASHING